



A classic that is still in vogue

A true classic yet never out of style, Easy Glass® Slim is suitable for homes, offices or commercial areas. Thanks to its slender base shoe, this system provides an extremely elegant appearance.

This lightweight railing is also very cost-effective and ideal to work with on sitel

- Light and medium use, including stairs
- Enjoy quick and easy glass fixing with the Safety Wedge System (wedges and rubber set)
- Can be combined with:
 - All Q-railing glass-mounted handrails, cap rails, U-profiles and edge protection
 - Q-lights Linear Light for LED-lit handrails and cap rails







EASY GLASS® SLIM VARIANTS

Slim


Top mount

- Also for in-floor mounting
- Optional base shoe cladding

Slim

Fascia mount

Optional base shoe cladding




*Only available on demand.

Does your project qualify for one of these custom base shoes, then please contact us to discuss the options.

Slim F*


Top mount


 Can be mounted at or beyond the edge of a surface




Railing bases All dimension drawings are in inches

EASY GLASS® SLIM - Base shoe, top mount

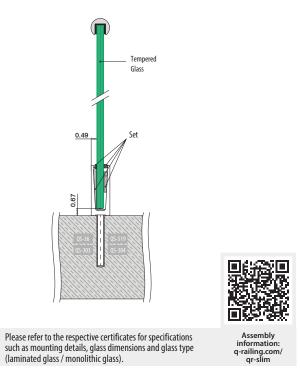

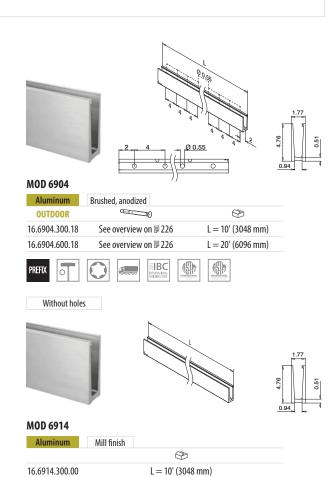

Railing bases EASY GLASS® SLIM - Base shoe corners, top mount



MOD 6313

Aluminum	Brushed, anodized	
OUTDOOR	CETTED O	
16.6313.004.18	See overview on ■ 226	1






PREFIX We can deliver the following service according to your specification:

- Cutting
 Bending
 Powder coating (aluminum mill finish products) Contact us for details.

Outer corner

IBC




MOD 6314

PREFIX

Aluminum	Brushed, anodized	
OUTDOOR	0	8
16.6314.004.18	See overview on	1

4






MOD 6904

Accessories		
Monolithic	T (glass thickness)	
19.6904.912.00	1/2" (12 mm)	L = 16.4' (5000 mm)
19.6904.919.00	3/4" (19 mm)	L = 16.4' (5000 mm)
Laminated		
19.6904.913.00	1/2" (12.76 mm)	L = 16.4' (5000 mm)
19.6904.914.00	9/16" (13.52 mm)	L = 16.4' (5000 mm)
19.6904.917.00	5/8" (16.76 mm)	L = 16.4' (5000 mm)
19.6904.918.00	11/16" (17.52 mm)	L = 16.4' (5000 mm)

Safety Wedge System: Glass is being clamped. Drilling is not necessary.





MOD 6901


Accessories		
19.6901.001.00	L = 8.2' (2500 mm)	



Accessories
EASY GLASS® - Multitool



Accessories		
	Q	
19.6920.000.00	Q-71	1












Railing bases


EASY GLASS® SLIM - End fittings, top mount

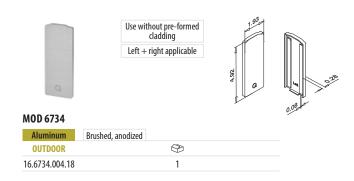














EASY GLASS® SLIM - Pre-formed claddings, top mount

Railing bases












316		
OUTDOOR	T (glass thickness)	8
14.6922.124.12	1/2" (12 mm)	L = 16.4' (5000 mm)
14.6922.134.12	1/2" - 9/16" (12.76 - 13.52 mm)	L = 16.4' (5000 mm)
14.6922.174.12	5/8" - 11/16" (16.76 - 17.52 mm)	L = 16.4' (5000 mm)
14.6922.214.12	13/16" - 27/32" (20.76 - 21.52 mm)	L = 16.4' (5000 mm)









Railing bases All dimension drawings are in inches


EASY GLASS® SLIM - Base shoe, fascia mount

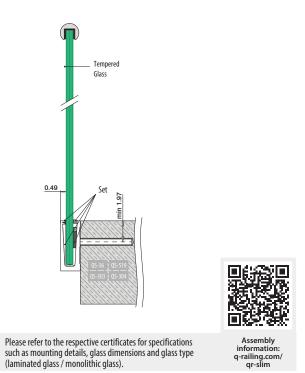





Railing bases

EASY GLASS® SLIM - Base shoe corners, fascia mount

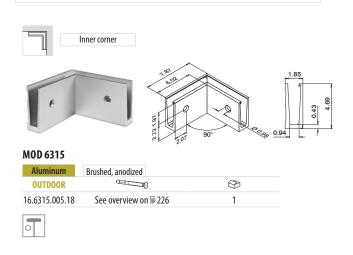









EASY GLASS® SLIM - Safety Wedge System (rubber and wedges set)



MOD 6904

Accessories		
Monolithic	T (glass thickness)	♦
19.6904.912.00	1/2" (12 mm)	L = 16.4' (5000 mm)
19.6904.919.00	3/4" (19 mm)	L = 16.4' (5000 mm)
Laminated		
19.6904.913.00	1/2" (12.76 mm)	L = 16.4' (5000 mm)
19.6904.914.00	9/16" (13.52 mm)	L = 16.4' (5000 mm)
19.6904.917.00	5/8" (16.76 mm)	L = 16.4' (5000 mm)
19.6904.918.00	11/16" (17.52 mm)	L = 16.4' (5000 mm)

Safety Wedge System: Glass is being clamped. Drilling is not necessary.

Accessories All dimension drawings are in inches EASY GLASS® - Accessories



MOD 6920

Accessories		
	Q	
19.6920.000.00	Q-71	1







Shim set for Easy Glass, 0.04", 0.08", 0.12", 0.16", 0.20" (1, 2, 3, 4, 5 mm) 520 pieces


Accessories		
	Q	↔
19.6921.000.00	0-62	1












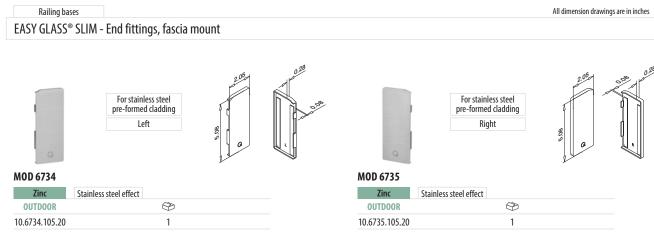


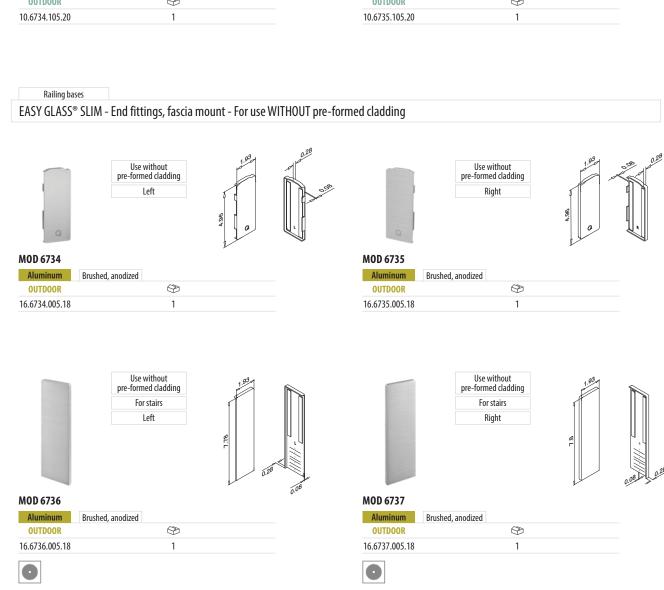



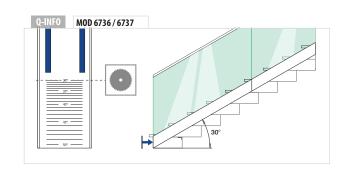

EASY GLASS® SLIM - Pre-formed claddings, fascia mount




MOD 6920

304		
INDOOR		
13.6920.005.12	L = 8.2' (2500 mm)	
316		
OUTDOOR		
14.6920.505.12	L = 16.4' (5000 mm)	



Railing bases

EASY GLASS® SLIM - Blind plug for fascia mounting



Plastic	Aluminum RAL 9006
OUTDOOR	
24.6922.007.36	10

